


TW 200/2350 - DATASHEET

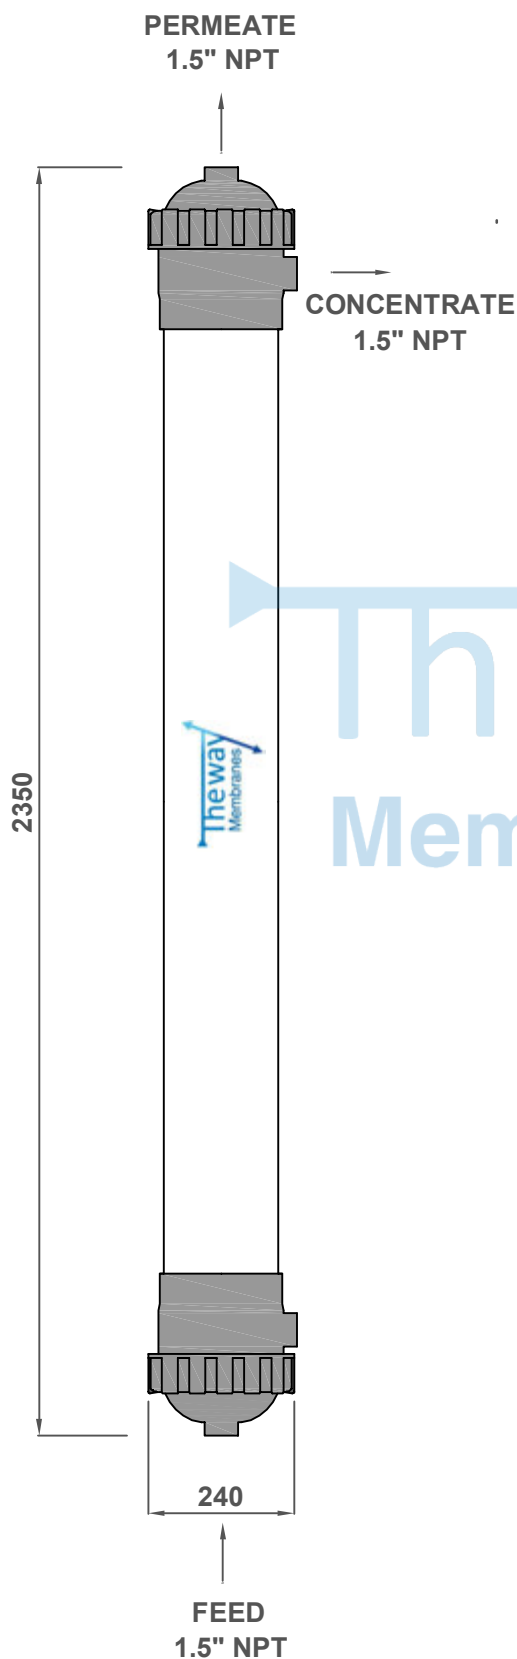

TECHNICAL SPECIFICATION	
Type	Hollow Fiber
Model	TW 200/2350
MOC of Membrane	PES
Body	uPVC
Potting	Epoxy
Cap	PVC
MWCO	120 KDa
Area	55 m ²
Size of Fiber	1.2 mm OD x 0.6 mm ID
Flow	Out-In
Operating Mode	Cross flow
Feed Pressure	3 kg/cm ² max
Tr Membrane Pressure	1 kg/cm ² max
Backwash Pressure	2 kg/cm ² max
Operating pH	1 to 13
Operating Temp	20 °C - 45 °C
Feed Flux	20 - 100 l/m ² /hr
Backwash Flux	50 - 300 l/m ² /hr
Filtration Time	15 - 60 mins
Backwash Time	20 - 60 secs
Flushing Time	20 - 60 secs

Dimensions in MM

Parameters change subject to Feed quality

General Tolerance +/- 5MM