


TRIDENT 55 - DATASHEET

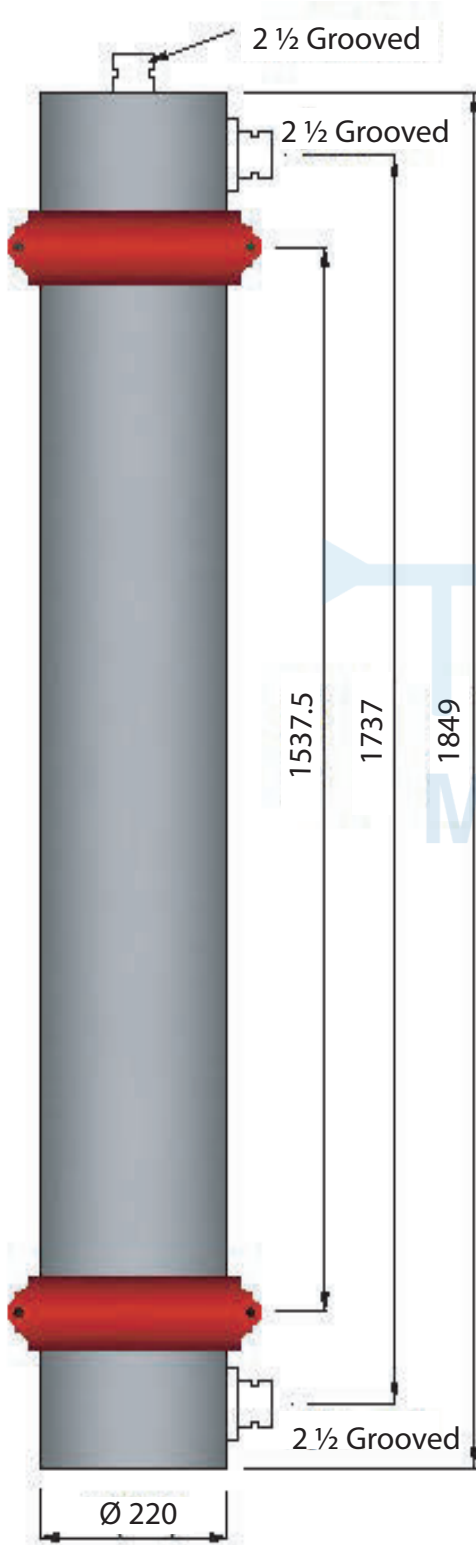

TECHNICAL SPECIFICATION	
Type	Hollow Fiber
Model	TRIDENT 55
MOC of Membrane	PES
Body	uPVC
Potting	Epoxy
Cap	PVC
MWCO	100 KDa
Area	55 m ²
Size of Fiber	0.8 mm ID
Flow	Out-In
Operating Mode	Cross flow/Dead end
Feed Pressure	3 kg/cm ² max
Tr Membrane Pressure	1 kg/cm ² max
Backwash Pressure	2 kg/cm ² max
Operating pH	1 to 13
Operating Temp	20 °C - 45 °C
Feed Flux	20 - 100 l/m ² /hr
Backwash Flux	50 - 300 l/m ² /hr
Filtration Time	15 - 60 mins
Backwash Time	20 - 60 secs
Flushing Time	20 - 60 secs

Dimensions in MM

Parameters change subject to Feed quality

General Tolerance +/- 5MM